

- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary





BVDSS	RDS(ON)	ID
100V	14mΩ	64A

Description

The FKBA0040 is the high cell density trenched N-ch MOSFETs, which provide excellent RDS(ON) and gate charge for most of the synchronous buck converter applications.

The FKBA0040 meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

PRPAK5X6 Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_c = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^{1,6}$	64	A
$I_D @ T_c = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^{1,6}$	40	A
I_{DM}	Pulsed Drain Current ²	130	A
EAS	Single Pulse Avalanche Energy ³	180	mJ
I_{AS}	Avalanche Current	60	A
$P_D @ T_c = 25^\circ C$	Total Power Dissipation ⁴	89	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	1.4	°C/W



FETek Technology Corp.

FKBA0040

N-Ch 100V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	100	---	---	V
$\text{R}_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=10\text{A}$	---	---	14	$\text{m}\Omega$
	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=4.5\text{V}$, $I_{\text{D}}=8\text{A}$	---	---	17	
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=250\mu\text{A}$	1.2	---	2.4	V
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{\text{DS}}=5\text{V}$, $I_{\text{D}}=20\text{A}$	---	30	---	S
R_g	Gate Resistance	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1.2	---	Ω
Q_g	Total Gate Charge (10V)	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=10\text{A}$	---	75	---	nC
Q_{gs}	Gate-Source Charge		---	15.5	---	
Q_{gd}	Gate-Drain Charge		---	20.3	---	
$T_{\text{d(on)}}$	Turn-On Delay Time	$V_{\text{DD}}=40\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_g=3.3\Omega$, $I_{\text{D}}=10\text{A}$	---	18.5	---	ns
T_r	Rise Time		---	8.8	---	
$T_{\text{d(off)}}$	Turn-Off Delay Time		---	58.8	---	
T_f	Fall Time		---	15.8	---	
C_{iss}	Input Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	4708	---	pF
C_{oss}	Output Capacitance		---	326	---	
C_{rss}	Reverse Transfer Capacitance		---	247	---	

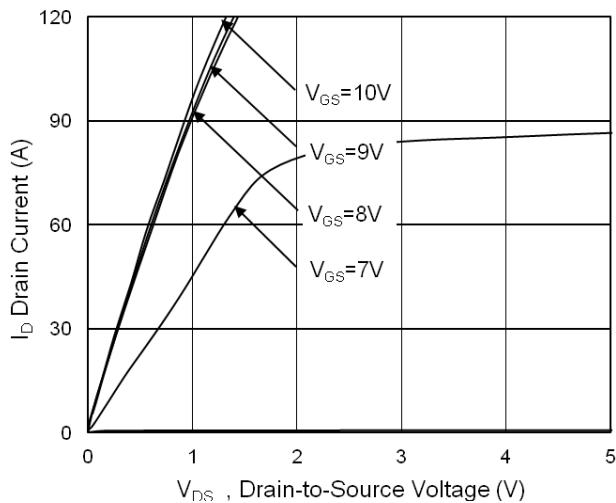
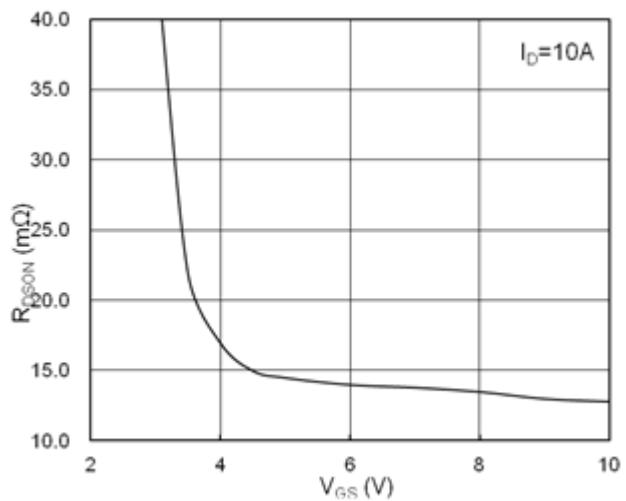
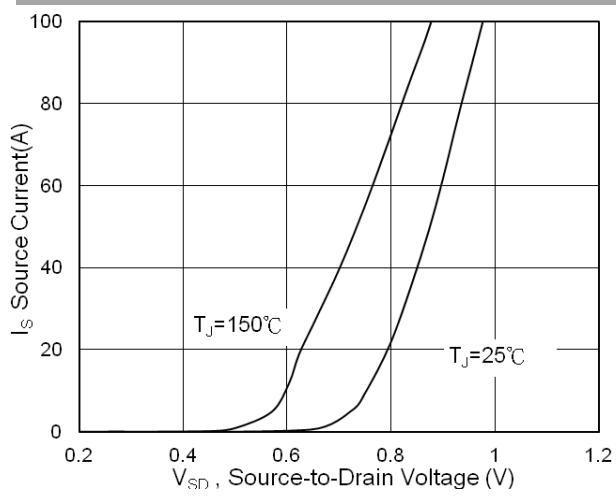
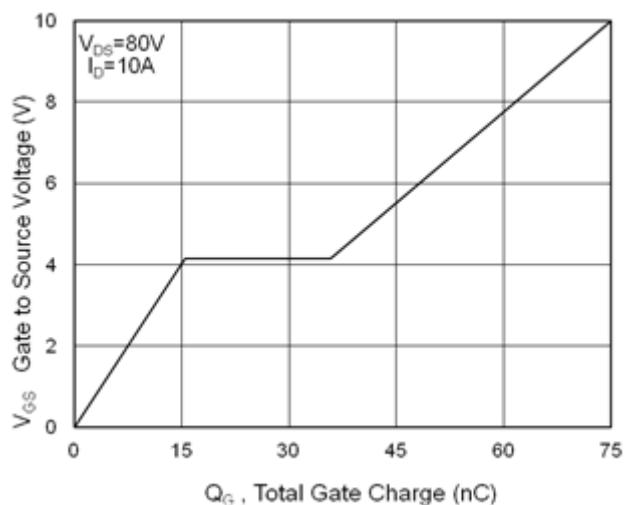
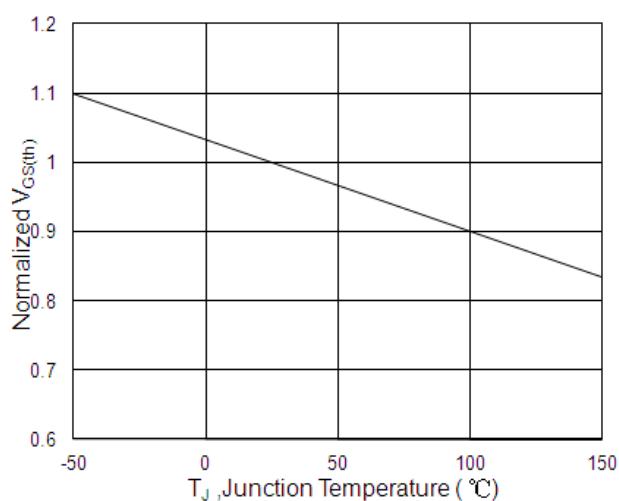
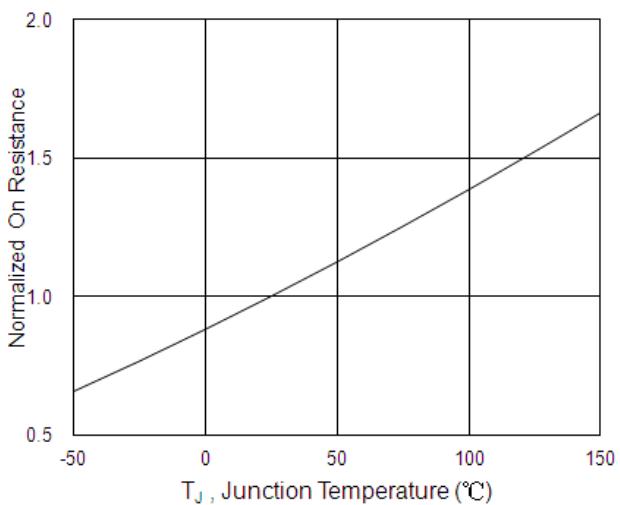
Diode Characteristics

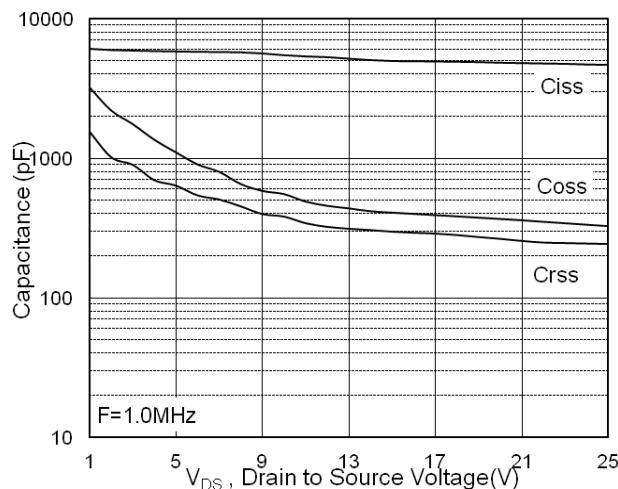
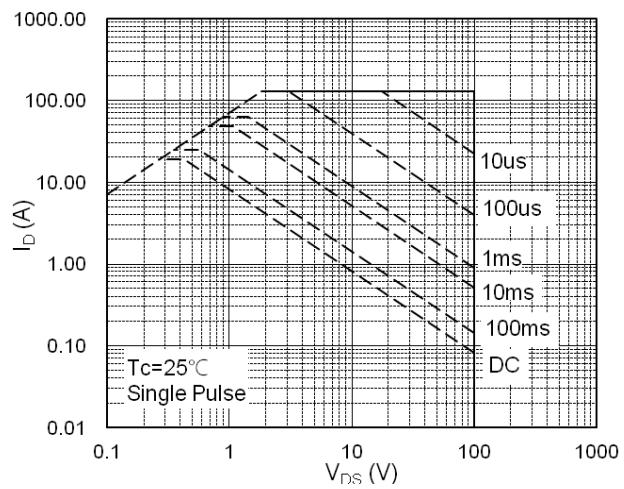
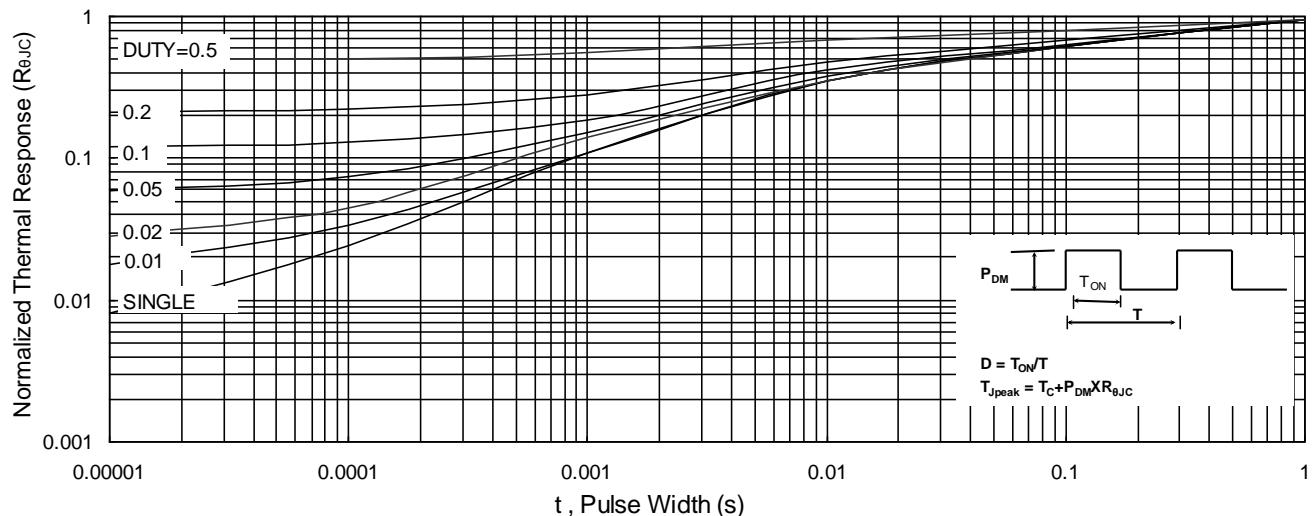
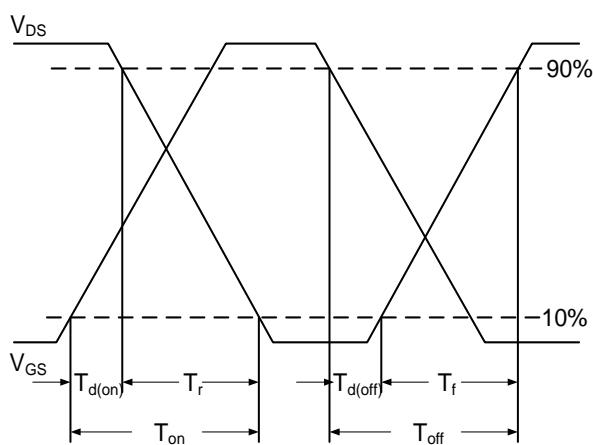
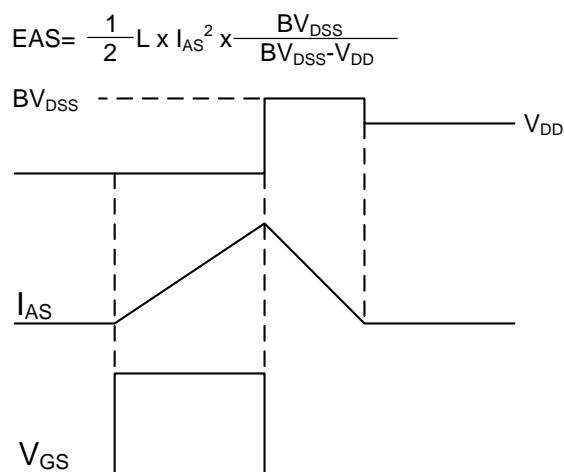
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,5}	$V_G=V_D=0\text{V}$, Force Current	---	---	64	A
I_{SM}	Pulsed Source Current ^{2,5}		---	---	130	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V
t_{rr}	Reverse Recovery Time	$I_F=10\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$,	---	24	---	nS
Q_{rr}	Reverse Recovery Charge	$T_J=25^\circ\text{C}$	---	28	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=60\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_{D} and I_{DM} , in real applications , should be limited by total power dissipation.
- 6.Package limitation current is 90A.

Typical Characteristics


Fig.1 Typical Output Characteristics

Fig.2 On-Resistance v.s Gate-Source

Fig.3 Forward Characteristics of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ vs. T_J

Fig.6 Normalized $R_{DS(on)}$ vs. T_J


Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Waveform